

Grease Guardian[®]
Automatic Grease Removal

SEPARATES & REMOVES
GREASE, OIL & FAT FROM KITCHEN WASTE WATER....



- IN BUSINESS SINCE 1977
- SUPPLIED IN OVER 40 COUNTRIES
- CAPABLE OF REMOVING 99% OF GREASE
- NO DOSING NEEDED
- SIMPLE BUT INTELLIGENT DESIGN
- QUALITY ASSURED (ISO9001 COMPANY)
- APPROVED (CE, ROHS, GOST, EN, NSF, BS)
- EASY TO INSTALL & MAINTAIN
- AT SOURCE OR BASEMENT INSTALLATION
- FULL CUSTOMER SUPPORT

Visit me, *GiorGio*, online to solve your grease problems!



www.greaseguardian.com



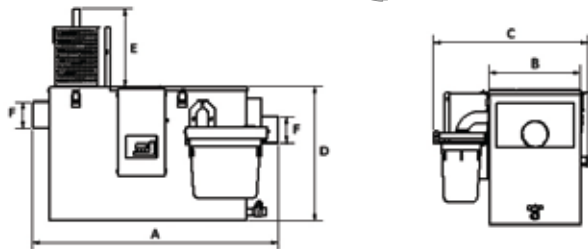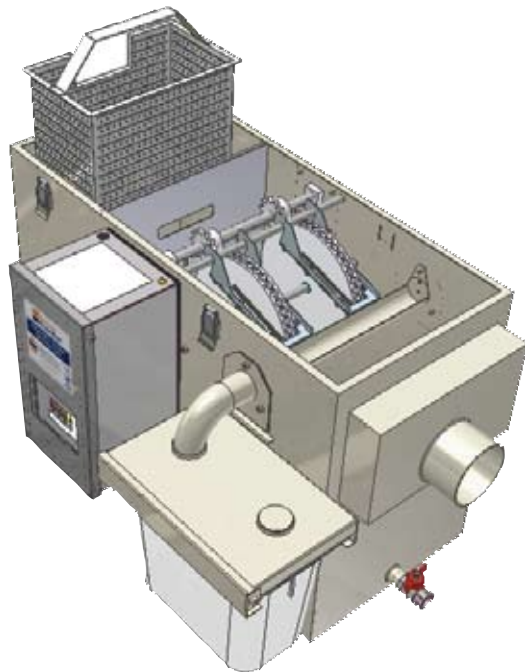

Three Stage Operation System

Stage 1 – Solids Collection

Wastewater from the kitchen is directed through the inlet of the Grease Guardian[®] where a removable strainer basket collects any solid debris.

Stage 2 – Grease & Oil Separation

Grease in the wastewater floats to the surface and is trapped while the clear water leaves the unit and enters the drainage system.

Stage 3 – Self Cleaning & Grease Removal

The timer-driven heating element is activated to liquefy grease, which is then removed by the skimming wheel and deposited into a portable container for recycling.

Can be connected to:

Pot wash sinks, pre-rinse sinks, combi ovens, Chinese cookers and floor drains



| Model | Length (A) | Width (B) | Width (C) | Height (D) | Basket (E) | Inlet/Outlet (F) | Max Flow |
|-------------------------------------|--|--------------------------|--|--------------------------------|---------------------------------|------------------|----------|
| <small>ALL DIMENSIONS IN MM</small> | <small>INCLUDES INLET & OUTLET</small> | <small>MAIN TANK</small> | <small>INCLUDING GREASE COLLECTION CONTAINER</small> | <small>WITH LID CLOSED</small> | <small>CLEARANCE NEEDED</small> | | |
| D1 | 640 | 310 | 515 | 330 | 200 | 60 | 0.75 l/s |
| D2 | 720 | 310 | 515 | 410 | 240 | 60 | 1.25 l/s |
| D3 | 840 | 310 | 620 | 450 | 270 | 90 | 1.75 l/s |
| D4 | 890 | 310 | 620 | 450 | 270 | 115 | 2.25 l/s |
| D5 | 1420 | 310 | 670 | 560 | 390 | 115 | 3.50 l/s |

Specification: Automatic grease trap with inbuilt grease skimming mechanism. 16 Gauge 304 Stainless Steel, 25 watt motor, 1.0kw heating element, 24 hour digital timer. 230V 50Hz as standard. 110V 60Hz also available. Each wheel skims 12kg of free floating grease per hour. Left-to-right or right-to-left handling of unit to suit preferred flow direction.

For invert levels please contact your local supplier.

Newry

Grease Guardian
Greenbank Industrial Estate
Newry BT34 2QX
Northern Ireland
T: +44(0)28 302 66616
F: +44(0)28 302 63233
E: sales@fmenvironmental.com
www.greaseguardian.com

Malta

Grease Guardian (Malta) Ltd
Water Technology House
A15B Industrial Estate
Marsa, Malta
T: +356 2122 6172
F: +356 2122 6171
E: fmmalta@fmenvironmental.com
www.greaseguardian.com

Distributor Details

Asia Biz Frontier Pte Ltd
18 Jalan Limbok
Singapore 548705
Tel: +65 8198 1813
Email: sales@abf-sg.com



www.greaseguardian.com

